



减振环 *Damping rings*



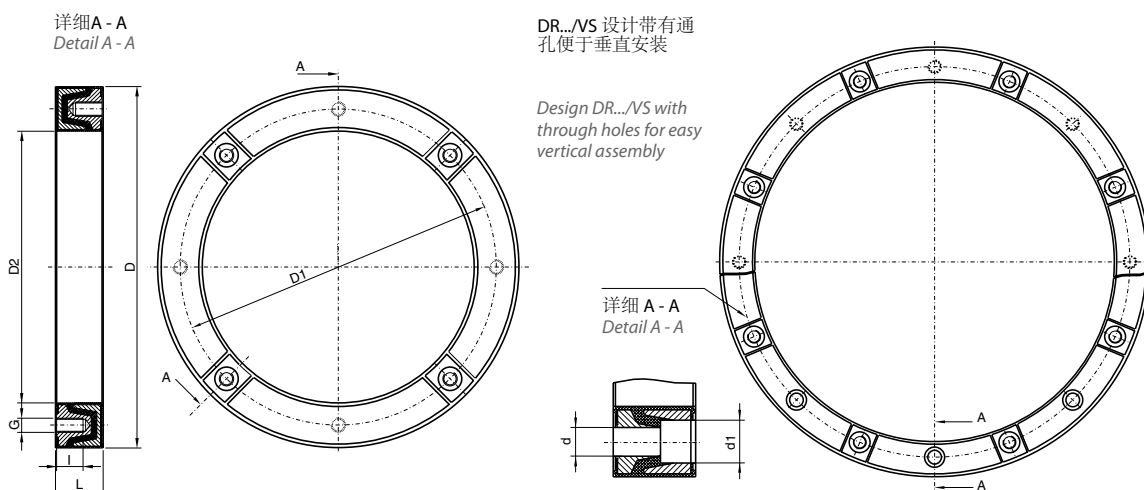
- 垂直/水平安装
- 橡胶柔性隔离-低成本降噪
- NBR橡胶防矿物油腐蚀
- 成型环具有密封功能，无需额外密封

- *Vertical and horizontal mounting*
- *Low cost noise level reducing as a result of rubber flexible separation*
- *Resistance against mineral-oil due to NBR-rubber*
- *Moulded ring-sealing, no additional sealing required*


型号
Model type
DR - V1 / B5 - 300 / VS

标准型 Standard version	200	VS-型 VS-Version	
	250		
	300		300
	350		350
	400		400
	450		450
	550		550
	660		660

设计 Design	
-	标准型 Standard version
VS	VS型 VS-Version

尺寸
Dimensions

减振环
Damping rings

减振环型号 Type of damping ring	IEC电机机座规格 IEC-Motor frame size	尺寸[mm] Dimensions [mm]							
		D	D1	D2	G	l	L	d	d1
DR-V1/B5-200	80, 90S / 90L	200	165	146	4 x M10	18	40	-	-
DR-V1/B5-250	100L / 112M	250	215	191	4 x M12	22	45	-	-
DR-V1/B5-300	132S / 132M	300	265	235	4 x M12	22	50	-	-
DR-V1/B5-350	160M / 160L / 180M / 180L	350	300	261	4 x M16	22	60	-	-
DR-V1/B5-400	200L	400	350	301	4 x M16	29	50	-	-
DR-V1/B5-450	225S / 225M	450	400	352	8 x M16	32	60	-	-
DR-V1/B5-550	250M / 280S / 280M	550	500	452	8 x M16	32	60	-	-
DR-V1/B5-660	315S / 315M	660	600	552	8 x M20	33	65	-	-
DR-V1/B5-300VS	132S / 132M	300	265	235	4 x M12	22	50	4 x 14	4 x 20
DR-V1/B5-350/VS	160M / 160L / 180M / 180L	350	300	261	4 x M16	22	60	4 x 18	4 x 26
DR-V1/B5-400/VS	200L	400	350	301	4 x M16	29	50	4 x 18	4 x 26
DR-V1/B5-450/VS	225S / 225M	450	400	352	8 x M16	32	60	8 x 18	8 x 26
DR-V1/B5-550/VS	250M / 280S / 280M	550	500	452	8 x M16	32	60	8 x 18	8 x 26
DR-V1/B5-660/VS	315S / 315M	660	600	552	8 x M20	32	65	8 x 22	8 x 26



工作温度为 +60 °C 时，允许的径向重量和弯曲载荷。
Permissible radial weight and bending loads with an operating temperature of +60 °C

$$F_{zul} \geq F_{\text{泵Pump}} + F_{\text{电机Motor}}$$

$$M_{b\text{ zul}} \geq F_{\text{电机Motor}} \times L1 - F_{\text{泵Pump}} \times L2$$

DR型号 DR-Type	200	250	300	350	400	450	550	660
F_{zul} [N]	385	755	1520	3780	5040	6800	13390	24720
$M_{b\text{ zul}}$ [Nm]	30	65	175	740	1100	1600	4400	9000